



Installation Instructions

Part Number 33-2175

This filter fits: **See catalog for current applications**

*FREE K&N DECAL To register your warranty, please see us online at knfilters.com/register. FREE K&N DECAL *

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure MUST be followed to ensure a proper fit and seal of the K&N® Air Filter.

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

INSTALLATION

1. Loosen the hose clamp on the air intake tube and disconnect the tube from the airbox lid.
2. Unfasten the four clips that hold the airbox lid to the airbox base and remove the lid from the vehicle.
3. Remove the stock air filter.
4. With a damp rag wipe off any dirt or grease from the inside of the airbox. The airbox must be clean and dry so the gasket will stick to the lid.
5. Install the self-sticking gasket to the airbox lid. (Fig. 1)
6. Install the K&N® Air Filter into the airbox base making sure that the three tabs on the filter are positioned into the little cavities next to the airbox clips. (Fig 2)
7. Re-install the airbox lid and fasten the four clips.
8. Re-install the air intake tube onto the airbox lid and tighten the hose clamp.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1

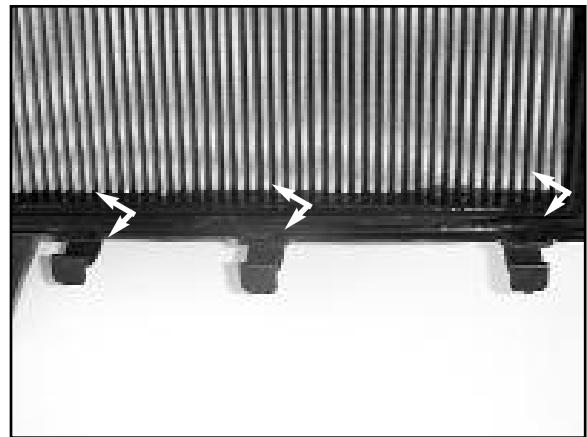


Fig. 2